

Crosby® ROV Eye Hooks

Load Rated Fatigue Rated **QT** **QUIC-CHECK®**



SEE APPLICATION AND WARNING INFORMATION


Para Español: www.thecrosbygroup.com

On Page 140

L-320R ROV EYE HOOKS



- Hook identification code stamped on each hook.
- Quenched and Tempered.
- **QUIC-CHECK®** deformation and angle indicators forged on the hook.
- Fluorescent yellow finish for high “subsea” visibility.
- Tip extension allows for easy handling.
- Sizes 3.2t through 31.5t utilize new integrated latch (S-4320) that meets the World class standard for lifting.
 - Heavy duty stamped latch interlocks with the hook tip.
 - High cycle, long life spring.
- Pad eyes are provided on either side of hook as cable guides. The cable is passed through a hole drilled in the latch that assists in allowing the “remotely operated” cable to open latch.
- Cables and drilled latches are not provided by Crosby. They can be fitted by your local Authorized Crosby Dealer. Crosby allows you to modify the latch as required to accomplish the task.

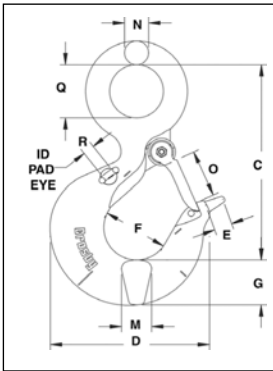

Working Load Limit (t)	Hook ID Code	L-320R Stock No.	Weight Each (kg)	Dimensions (mm)										Replacement Latch Stock No.
				C	D	E	F	G	M	N	O	Q	R	
†3.2	HA	1298427	1.01	119	101	25	41	29	24	15	28	32	6	1096468
†5.4	IA	1298497	2.04	147	122	25	51	37	33	18	35	40	6	1096515
†8	JA	1298567	3.92	187	159	35	64	46	42	23	41	51	10	1096562
†11.5	KA	1298637	7.02	230	189	35	76	57	41	28	53	62	10	1096609
†16	LA	1298707	10.1	256	211	35	83	66	49	32	58	72	10	1096657
†22	NA	1298777	18.4	318	262	45	108	76	60	40	77	89	19	1096704
†31.5	OA	1298847	28.1	357	346	-	127	92	76	44	93	89	19	1090161
37	PA	1298857	48.5	462	357	-	137	116	81	51	95	114	19	1090189
45	SA	1298867	62.1	511	392	-	152	129	82	55	114	125	19	1090189
60	TA	1298877	102	602	470	-	178	152	99	64	130	145	19	1090205

*Minimum Ultimate Load is 4 times the Working Load Limit.

† Utilizes Crosby S320N style hook.



G-209R

NOTE: ROV Shackles available on pages 86-87