

Super Shackle No 858 Bow shackle with safety bolt


Unique Benefits with The Super Shackle

In certain situations a demand for extra Working Load Limit occurs in others the lifting environment has limited space for the lifting application. The 858 Super Shackle enables a higher working load limit for the same nominal size.

The Super shackle meets the US Federal Specification RR.C-271. It is a grade 8 shackle and has all parts hot dipped galvanized, including the safety bolt.



- Standard:** US Federal Spec. RR.C-271 Type IVA Class 3, Grade B
- Material:** High tensile steel. Quenched & Tempered, Grade 8
- Finish:** All parts hot-dip galvanized + brown color marking
- Design Factor:** 5:1
- Documentation:** Test certificate and traceable 3.1 certificate
- Temperature:** -40°C to 200°C

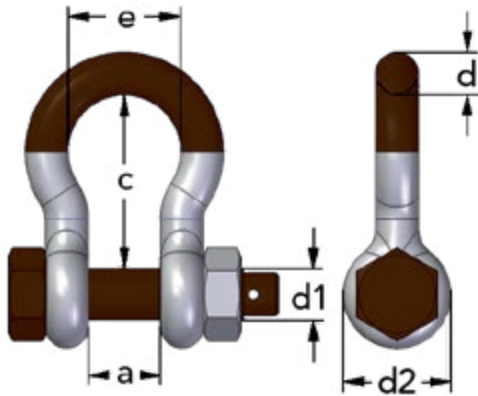

Stock No.	WLL (t) 5:1	Pin d1 (mm)	Nominal Size d		Inner Width a (mm)	Inner Length c (mm)	Bow Width e (mm)	Eye Outer d2 (mm)	Weight (kg)
			(mm)	(in)					
A085813	3.3	16	13	1/2"	21	51	33	33	0.4
A085816	5.0	19	16	5/8"	27	60	42	40	0.7
A085819	7.0	22	19	3/4"	31	71	49	48	1.2
A085822	9.5	25	22	7/8"	37	84	60	52	1.7
A085825	12.5	28	25	1"	43	95	68	60	2.5
A085828	15.0	32	28	1 1/8"	46	108	74	64	3.4
A085832	18.0	35	32	1 1/4"	52	119	83	72	4.8
A085835	21.0	38	35	1 3/8"	57	132	89	76	7
A085838	30.0	42	38	1 1/2"	60	146	98	84	8.8
A085845	40.0	50	45	1 3/4"	74	178	127	105	15

Split pin included